

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
29 January 2004 (29.01.2004)

PCT

(10) International Publication Number  
WO 2004/009298 A1

(51) International Patent Classification<sup>7</sup>: B25D 9/02, 9/04,  
E21B 1/24, 1/26, 1/30, 7/24

(74) Agent: WEST-WALKER, Nigel; P.O.Box 4, Picton 7372  
(NZ).

(21) International Application Number:  
PCT/NZ2003/000158

(22) International Filing Date: 23 July 2003 (23.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
516798 24 July 2002 (24.07.2002) NZ

(71) Applicant (for all designated States except US): BANTRY  
LIMITED [NZ/NZ]; Clarke Boyce, Level 1, 104 Victoria  
Street,, Christchurch (NZ).

(72) Inventor; and


(75) Inventor/Applicant (for US only): JOHNSON, Garrick,  
Ross [NZ/NZ]; 17 Hanrahan Street, Christchurch (NZ).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,  
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,  
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: SONIC DRILL

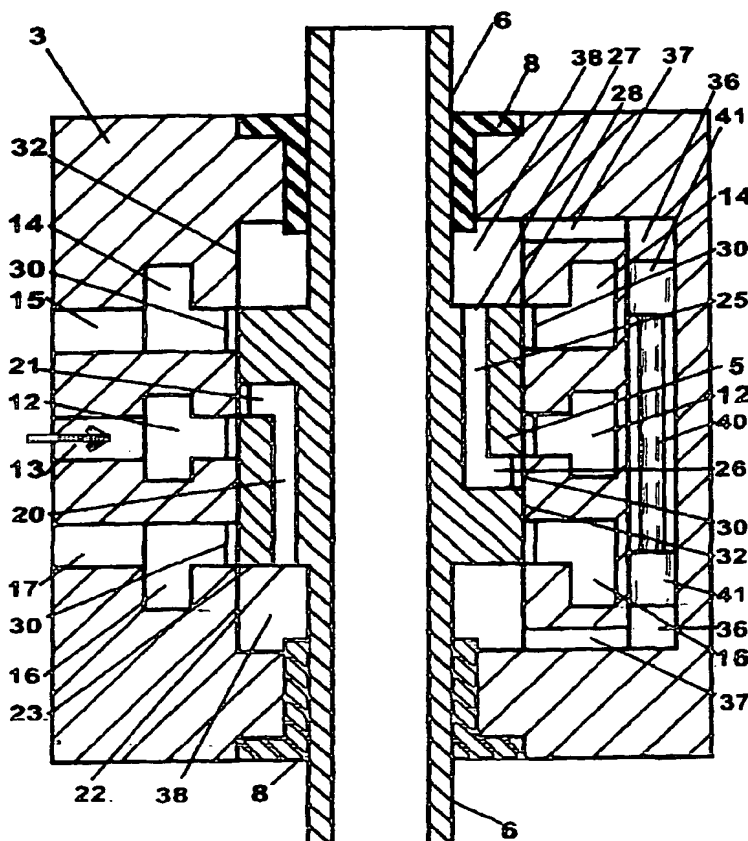

(57) Abstract: A sonic drilling apparatus having a work piston within a cylinder chamber to provide a vibratory force through the alternate application of fluid under pressure into the bore above and below the piston in a manner that the piston will be forced to reciprocate within the bore. The cylinder chamber includes an inlet gallery to allow fluid under pressure to pass into the bore above a first face of the work piston and an exhaust gallery to allow fluid to escape from the bore below the second face of the work piston. A relief bypass is provided to prevent excessive build up of pressure in the bore during the reciprocating movement of the work piston.

Best Available Copy



**Published:**

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## SONIC DRILL

### Background to the invention

5           Sonic drilling is a technique of driving a mandrel or a pipe into the ground such as an earthen formation or into a semi solid object by creating a vibratory force and applying the vibrations generated to the mandrel. The vibratory force generally consists of strong sinusoidal sonic vibrations up to approximately 200Hz which are tuned to or close to the resonant frequency of the mandrel. The effect of the sonic vibrations is to fluidize a  
10           portion of the earth immediately surrounding the mandrel and when a load is applied to the mandrel, the sonic vibrations will facilitate the passage of the mandrel into the earthen formation. The soil surrounding the mandrel does not form part of the resonantly vibrating system and instead the particles of the soil assume a random vibration relative to each other and this fluidization will initially facilitate the passage of the mandrel  
15           through the earth formation, and eventually lead to compaction of the soil around the mandrel when the vibrations are removed.

### Prior art

          Resonant sonic drilling generally consists of a drill head which includes a form of  
20           oscillator which can generate longitudinal sinusoidal pressure waves which are transmitted to a mandrel which has a drill bit or similar at the free end of the mandrel. Various means of generating the pressure waves for application to the mandrel are known and one such means is disclosed in US Patent specification 5,417,290 (Barrow). This specification describes a sonic head which includes a pair of eccentric rollers which  
25           revolve at a high speed in a counter rotating direction within orbital races contained in the head. The sonic head is fixed to the top of a mandrel and the energy impulses created are thereby transmitted to the mandrel.

          Other methods of creating and utilising sonic energy for application to a mandrel  
30           are also disclosed in US Patent Specifications 3,375,884 (Bodine); 3,379,263 (Bodine);

4,836,299 (Bodine), 4,527,637 (Bodine); 5,549,170 (Barrow); and 5,562,169 (Barrow) and WO01/83933 (Bar-Cohen).

5 All of the above devices utilize a mechanical means such as counter-rotating rollers to generate the sinusoidal pressure waves and as such are prone to an undesirable amount of down time because of frictional problems and the high mechanical loading imparted to the componentry.

10 Another method of generating the sinusoidal pressure waves is described in WO 01/83933. The method consists in utilising piezoelectric stack as an actuator for generating the vibrations

#### **Object of the invention**

15 It is therefore an object of this invention to provide an improved means of generating sinusoidal pressure waves utilising a high pressure fluid acting directly on a piston within a cylinder.

#### **Disclosure of the invention**

20 In one form the invention comprises apparatus for generating sinusoidal pressure waves for application to a mandrel, said apparatus including

a cylinder including a chamber which has a bore, an inlet gallery and an exhaust gallery,

25 a work piston adapted to have reciprocal movement in the bore of the chamber and having a radial wall which will seal against the wall of the bore of the chamber during its reciprocal movement within the chamber,

30 the work piston having a first land at one end of the work piston and a second land at the second end of the work piston,

means to alternately

duct fluid under pressure from the inlet gallery into the bore of the cylinder above the first land of the work piston and be exhausted from the bore below the second land of the piston into the exhaust gallery to move the work piston within the bore, and

5 to duct fluid under pressure from the inlet gallery into the bore of the cylinder below the second land of the work piston and be exhausted from the bore above the first land of the piston into the exhaust gallery to reciprocate the piston within the bore,

10 a piston shaft connected to the work piston and adapted to transmit the forces generated by the reciprocatory motion of the piston to a mandrel.

Preferably each inlet gallery of the piston has an inlet port to enable pressurised fluid to enter the gallery, said inlet gallery communicating with the bore of the cylinder through a port which terminates at the surface of the wall of the bore.

15

Preferably the chamber includes a relief bore having a first end open to the bore of the cylinder above the first radial face of the work piston and having a second end open to the bore of the cylinder below the second radial face of the work piston, said relief bore including a reciprocable relief piston, the movement of which is determined by the movement of fluid into and out of the relief bore from the cylinder chamber.

20

Preferably the apparatus includes

a relief bore located in the chamber,

25

a relief piston located in the relief bore and adapted to have reciprocal movement within the bore and to seal against the wall of the relief bore during its reciprocal movement,

a first relief bypass which communicates with the portion of the bore of the cylinder at one end of the work piston and with the relief bore at one end of the relief piston,

5 a second relief bypass which communicates with the portion of the bore of the cylinder at the second end of the work piston and which communicates with the relief bore at the second end of the relief piston,

10 the construction and arrangement being that as the work piston moves in one direction within the bore of the cylinder, fluid within the bore at a first end of the cylinder will be forced through the first relief bypass into the first end of the relief bore to move the relief piston within the relief bore to pressurize fluid within the second end of the relief bore and to move fluid through the second relief bypass into the second end of the bore of the cylinder.

15

Preferably each inlet gallery extends 360° around the wall of the chamber.

20 Preferably the body of the work piston includes a first transfer gallery extending longitudinally through the body and communicating through the radial wall of the work piston with said inlet gallery for a predetermined time during the reciprocatory movement of the work piston and also communicating with the bore of the cylinder through the first radial face of the work piston.

25 Preferably the body of the work piston includes a second transfer gallery extending longitudinally through the body and communicating through the radial wall of the work piston with said inlet gallery for a predetermined time during the reciprocatory movement of the work piston and also communicating with the bore of the cylinder through the second radial face of the work piston.

30 Preferably the chamber includes two exhaust galleries,

the first exhaust gallery communicating with the cylinder chamber above the first radial face of the work piston and

the second exhaust gallery communicating with the bore of the cylinder below the  
5 second radial face of the work piston,

the first and second exhaust galleries including outlet ports to enable fluid within the galleries to be ducted away from the bore of the cylinder.

10 Preferably the location of the opening of the first transfer gallery in the radial wall of the work piston is offset longitudinally to the opening of the second transfer gallery in the radial wall of the work piston.

Preferably the cylinder is supported by a rig and the work piston includes a piston  
15 shaft which is connectable to the mandrel.

Preferably the cylinder chamber forms part of a drill head which includes a ballast weight.

## 20 **Brief description of the drawings**

Preferred forms of the invention will now be described with the aid of the accompanying drawings wherein:

Figure 1 is a diagrammatic view, partly in section of the basic form of the sonic  
25 drill of the present invention.

Figure 2 is a diagrammatic sectional view illustrating a piston within the cylinder, the piston being in the neutral position.

30 Figure 3 is a diagrammatic view similar to Figure 2 but illustrating the piston at the commencement of a stroke in a first direction

Figure 4 is a diagrammatic view similar to Figure 2 but illustrating the piston at the commencement of a stroke in a second direction

**5 Description of one preferred embodiment of the invention.**

As illustrated diagrammatically in Figure 1 of the drawings, the apparatus includes a drill head 1 which is positioned above the ground 2 and is suitably supported in a rig (not shown in the drawings) in a manner that will be apparent to those skilled in the art. The drill head includes a cylinder chamber 3 on which a ballast weight 4 is mounted. A work piston 5 has reciprocating longitudinal movement within the bore of the cylinder chamber 3 and the piston 5 is connected to a piston shaft 6 which is guided at a first end 6a in a sleeve 4a formed in the ballast weight 4. A suitable fluid seal 8 is located in the sleeve 4a to ensure an adequate seal between the bore of the cylinder chamber 3 and ambient. The second end 6a of the piston shaft 6 extends through a seal 9 located in an end plate 10 of the cylinder chamber 3 to enable the bore of the chamber below the piston 5 to be sealed from ambient. The piston shaft may be hollow to facilitate the sampling of cores as will be known in the art.

In the form illustrated in Figure 1, the piston shaft 6 bears on or forms part of a mandrel 11 or a drill string which as illustrated is partly embedded in the ground 2. Means (not shown in the drawings) as will be apparent to those skilled in the art may also be provided to rotate the drill string or mandrel to ensure the integrity of any screwed joints that may be employed in the drill string, and also to facilitate the disassembly of the drill string and the controlled guidance of the drill string during operation.

As specifically illustrated in Figures 2, 3 and 4, the cylinder chamber 3 includes an inlet gallery 12 having an inlet port 13 to which a source of high pressure fluid can be connected. The cylinder chamber also includes a first exhaust gallery 14 having an outlet port 15 and a second exhaust gallery 16 having an outlet port 17.



The work piston 5 includes a first transfer gallery 20 which can communicate with an opening 21 in the axial face of the piston 5 and which extends longitudinally through the piston to exit at 22 in the land 23 of the work piston. As illustrated, the opening 21 is offset from the longitudinal center of the piston. The piston also includes a second transfer gallery 25, one end of which is open at 26 through a port 30 in the axial wall of the piston with the other end being open at 27 in the land 28 of the piston. As in the case of the first transfer gallery 20, the opening 26 of the second transfer gallery 25 is offset from the longitudinal center of the piston an equivalent but opposite amount of distance to that of the opening 21.

The apparatus also includes a fluid by pass which in a highly preferred form comprises a bore 36 formed longitudinally in the cylinder and which communicates via a duct 37 with the cylinder chamber 38 both above and below the piston 5. A reciprocating by pass piston 40 has free longitudinal movement within the bore 36 and suitable fluid seals 41 are located at either end of the piston 40 to prevent the passage of fluid past the seals.

In operation fluid under pressure is ducted to the port 13 and passes into the inlet gallery 12 which preferably extends 360° around the cylinder wall. When the piston is in the position indicated in Figure 3, the pressurized fluid will pass into the first transfer gallery 20 as indicated by the arrows and exit through the opening 22 in the axial face of the piston into the chamber 38. At this position the exhaust ports to the gallery 17 are closed while the exhaust ports to the gallery 14 are open so that the interior of the chamber above the piston is open to the gallery 14. It will be noted that at all times the chamber 38 both above and below the piston remain open to the ducts 37 and consequently to the bore 36.

The pressure of the fluid will act on the land 23 of the piston and this will cause the piston to move in the direction of the arrow A – A (see Figure 3). The movement of the piston will then incrementally close the opening of the first transfer gallery 20 to the inlet gallery 12 and will incrementally close the cylinder chamber 38 to the exhaust

gallery 14. When the piston has reached a stage whereby both the opening 21 of the first transfer gallery 20 to the inlet gallery 20 is closed and the chamber 38 is closed to the exhaust gallery 14, fluid within the chamber above the piston will tend to flow into the duct 37 and into the bore 36. Pressure will therefore be exerted on the end face of the by pass piston 40 which will move in the direction of the arrow. This will relieve the pressure in the chamber 38, and prevent excessive pressure build up in the chamber 38 above the piston, thereby allowing the work piston 5 to complete its stroke.

As the work piston continues movement in the direction of the arrow A - A in Figure 3, the opening 26 of the second transfer gallery 25 will commence to register with the inlet gallery 12 and fluid under pressure will flow through the second transfer gallery 25 and out of the opening 27 in the land 28 of the piston into the chamber 38 above the piston. The upward movement of the piston will continue until the piston reaches the position illustrated in Figure 4, at which stage the pressure of the fluid entering the cylinder chamber 38 via the opening 27 in the second transfer duct 25 will commence to force the piston back into the second cycle of the operation.

The backwards and forwards movement of the piston illustrated in Figures 3 and 4 will accordingly automatically continue in conjunction with the resonant spring mass system of the drill string as long as fluid under pressure obtains within the inlet gallery and the fluid is able to exit from the exhaust galleries 14 and 16. It will of course be understood that the inlet and exhaust galleries are preferably joined into a loop into which an appropriate pump is located to generate the required fluid pressure.

Depending upon the relative volumes of the component parts and on the pressure of the fluid very considerable reciprocating forces can therefore be generated with the speed of reciprocation of the piston being dependent not only on the pressure of the fluid but also on the relative timing of the porting arrangement and also on the resonant frequency of the mandrel/drill string.

It will also be understood that the preferred form of fluid will generally be hydraulic or similar oil, but the fluid can also be a gas such as air or steam which is supplied at an appropriate volume and pressure by any known pressure generating system. One such pressure generating system can for instance be a form of internal combustion engine.

Having described a preferred form of the invention, it will be apparent to those skilled in the art that modifications and amendments can be made to the specific preferred embodiments and yet still come within the general concept of the invention. All such modifications and amendments are intended to fall within the scope of this invention.

## CLAIMS

1. Apparatus for generating sinusoidal pressure waves for application to a mandrel, said apparatus including

5 a cylinder including a chamber which has a bore, an inlet gallery and an exhaust gallery,

a work piston adapted to have reciprocal movement in the bore of the chamber and having a radial wall which will seal against the wall of the bore of the chamber  
10 during its reciprocal movement within the chamber,

the work piston having a first land at one end of the work piston and a second land at the second end of the work piston,

15 means to alternately

duct fluid under pressure from the inlet gallery into the bore of the cylinder above the first land of the work piston and be exhausted from the bore below the second land of the piston into the exhaust gallery to move the work piston within the bore, and

to duct fluid under pressure from the inlet gallery into the bore of the cylinder  
20 below the second land of the work piston and be exhausted from the bore above the first land of the piston into the exhaust gallery to reciprocate the piston within the bore,

a piston shaft connected to the work piston and adapted to transmit the forces generated by the reciprocatory motion of the piston to a mandrel.

25

2. Apparatus for generating sinusoidal pressure waves for application to a mandrel as claimed in claim 1, wherein each inlet gallery of the piston has an inlet port to enable pressurised fluid to enter the gallery, said inlet gallery communicating with the bore of the cylinder through a port which terminates at the surface of the wall of the bore.

30

3. Apparatus for generating sinusoidal pressure waves for application to a mandrel as claimed in claim 1, wherein the chamber includes a relief bore having a first end open to the bore of the cylinder above the first radial face of the work piston and having a second end open to the bore of the cylinder below the second radial face of the work piston, said relief bore including a reciprocable relief piston, the movement of which is determined by the movement of fluid into and out of the relief bore from the cylinder chamber.

4. Apparatus for generating sinusoidal pressure waves for application to a mandrel as claimed in claim 3, including

a relief bore located in the chamber,

a relief piston located in the relief bore and adapted to have reciprocal movement within the bore and to seal against the wall of the relief bore during its reciprocal movement,

a first relief bypass which communicates with the portion of the bore of the cylinder at one end of the work piston and with the relief bore at one end of the relief piston,

a second relief bypass which communicates with the portion of the bore of the cylinder at the second end of the work piston and which communicates with the relief bore at the second end of the relief piston,

the construction and arrangement being that as the work piston moves in one direction within the bore of the cylinder, fluid within the bore at a first end of the cylinder will be forced through the first relief bypass into the first end of the relief bore to move the relief piston within the relief bore to pressurize fluid within the second end of the relief bore and to move fluid through the second relief bypass into the second end of the bore of the cylinder.

5. Apparatus for generating sinusoidal pressure waves for application to a mandrel as claimed in claim 1, wherein each inlet gallery extends 360° around the wall of the chamber.

5

6. Apparatus for generating sinusoidal pressure waves for application to a mandrel as claimed in claim 1, wherein the body of the work piston includes a first transfer gallery extending longitudinally through the body and communicating through the radial wall of the work piston with said inlet gallery for a predetermined time during the reciprocary movement of the work piston and also communicating with the bore of the cylinder through the first radial face of the work piston.

10

7. Apparatus for generating sinusoidal pressure waves for application to a mandrel as claimed in claim 1, wherein the body of the work piston includes a second transfer gallery extending longitudinally through the body and communicating through the radial wall of the work piston with said inlet gallery for a predetermined time during the reciprocary movement of the work piston and also communicating with the bore of the cylinder through the second radial face of the work piston.

15

8. Apparatus for generating sinusoidal pressure waves for application to a mandrel as claimed in claim 1, wherein the chamber includes two exhaust galleries,

20

the first exhaust gallery communicating with the cylinder chamber above the first radial face of the work piston and

25

the second exhaust gallery communicating with the bore of the cylinder below the second radial face of the work piston,

the first and second exhaust galleries including outlet ports to enable fluid within the galleries to be ducted away from the bore of the cylinder.

30


9. Apparatus for generating sinusoidal pressure waves for application to a mandrel as claimed in claim 1, wherein the location of the opening of the first transfer gallery in the radial wall of the work piston is offset longitudinally to the opening of the second transfer gallery in the radial wall of the work piston.

5


10. Apparatus for generating sinusoidal pressure waves for application to a mandrel as claimed in claim 1, wherein the cylinder is supported by a rig and the work piston includes a piston shaft which is connectable to the mandrel.

10 11 Apparatus for generating sinusoidal pressure waves for application to a mandrel as claimed in claim 1, wherein the cylinder chamber forms part of a drill head which includes a ballast weight.

1 / 3

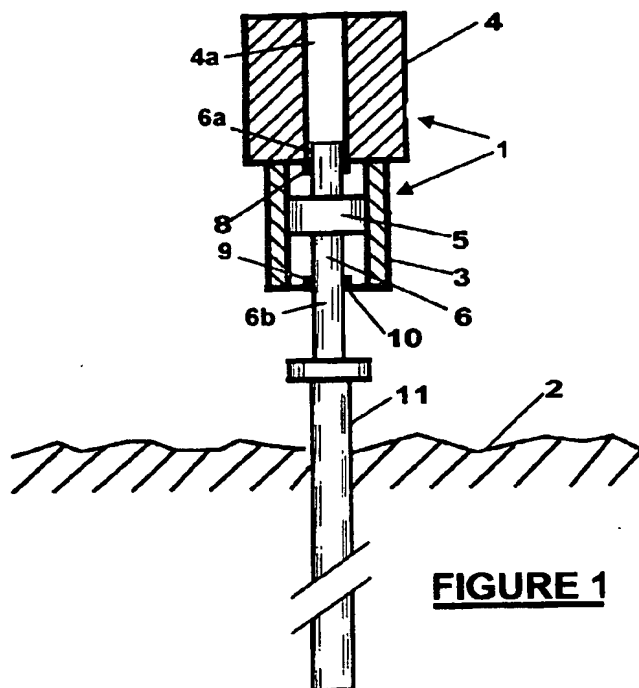


**FIGURE 1**

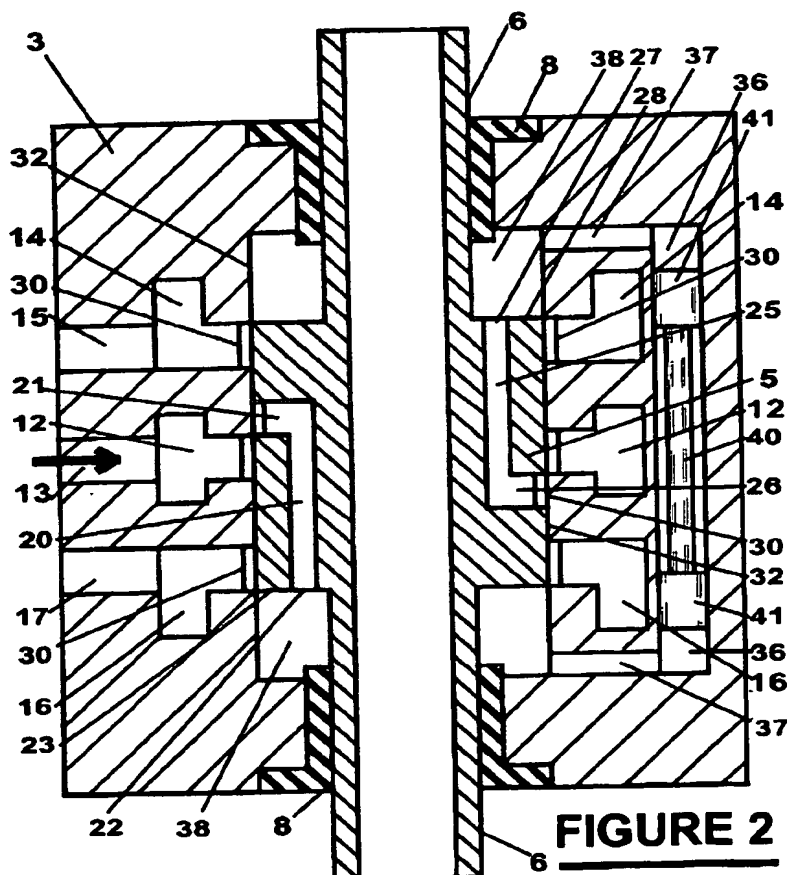


**FIGURE 2**



2 / 3

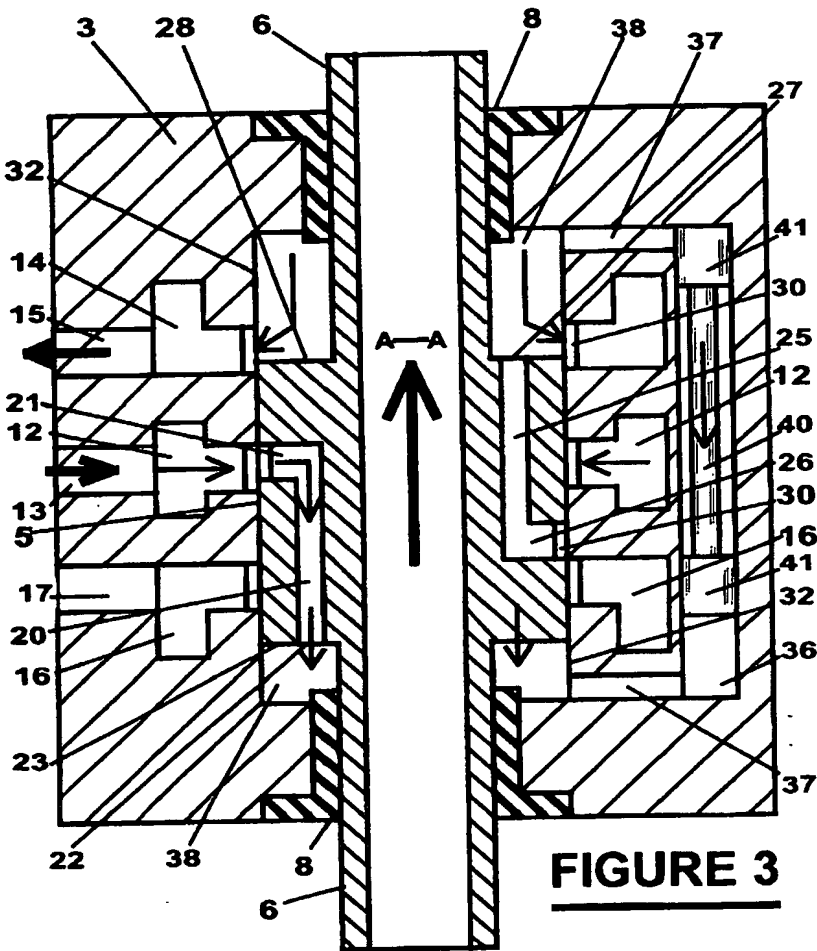

3 / 3

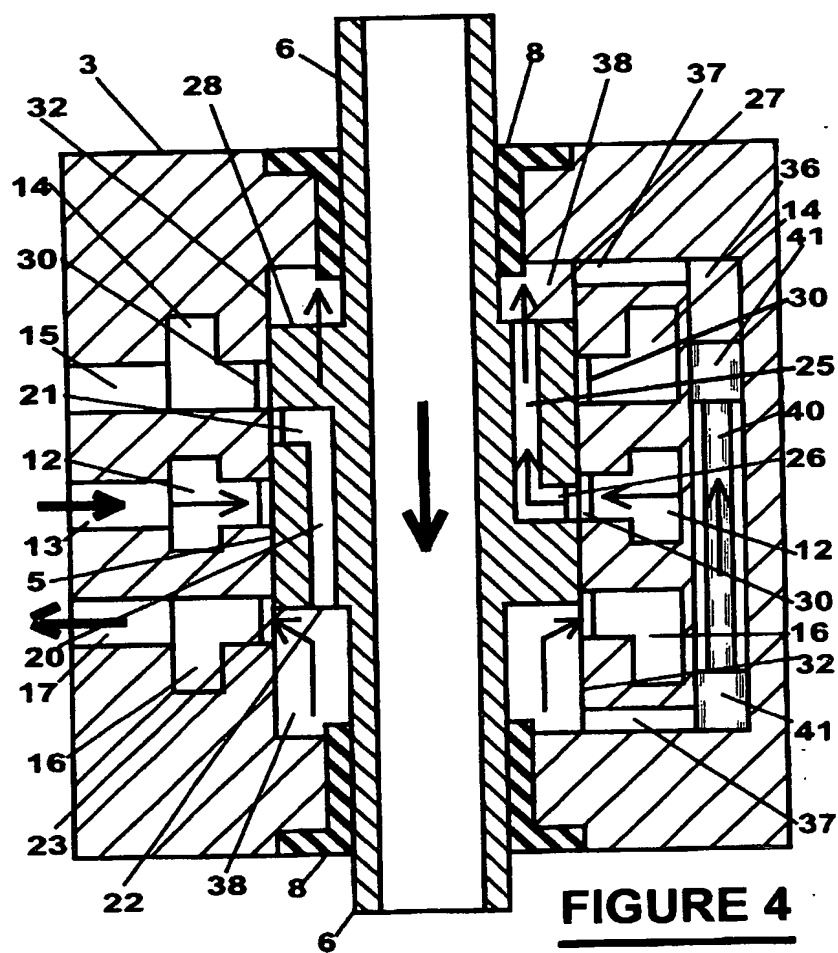

# INTERNATIONAL SEARCH REPORT

International application No.  
**PCT/NZ03/00158**

<b>A. CLASSIFICATION OF SUBJECT MATTER</b>					
Int. Cl. <sup>7</sup> : B25D 9/02, 9/04, E21B 1/24, 1/26, 1/30, 7/24					
According to International Patent Classification (IPC) or to both national classification and IPC					
<b>B. FIELDS SEARCHED</b>					
Minimum documentation searched (classification system followed by classification symbols)					
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched					
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) WPAT (B25D 9/02, 9/04, E21B 1/24, 1/26, 1/30, 7/24 and keywords: sonic drill, piston, reciprocate and like terms)					
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>					
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.			
X	US 5222425 A (DAVIES) 29 June 1993 Column 4 line 49 - column 5 line 45	1 - 2, 5 - 11			
X	US 5392865 A (PIRAS) 28 February 1995 Column 4 lines 10 - 54	1 - 2, 5 - 11			
A	GB 2345931 A (BAKER HUGHES INCORPORATED) 26 July 2000 Figure 8, page 16 lines 14 - 29	1 - 11			
D, A	US 5549170 A (BARROW) 27 August 1996 Abstract	1 - 11			
<input type="checkbox"/> Further documents are listed in the continuation of Box C <input checked="" type="checkbox"/> See patent family annex					
<table style="width: 100%; border: none;"> <tr> <td style="width: 33%; vertical-align: top;"> <p>* Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </td> <td style="width: 33%; vertical-align: top;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&amp;" document member of the same patent family</p> <p>"D" document mentioned in the description</p> </td> <td style="width: 33%;"></td> </tr> </table>			<p>* Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&amp;" document member of the same patent family</p> <p>"D" document mentioned in the description</p>	
<p>* Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&amp;" document member of the same patent family</p> <p>"D" document mentioned in the description</p>				
Date of the actual completion of the international search 18 November 2003		Date of mailing of the international search report 28 NOV 2003			
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA E-mail address: pct@ipaustalia.gov.au Facsimile No. (02) 6285 3929		Authorized officer  <b>JASON PREMNATH</b> Telephone No : (02) 6283 2127			

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/NZ03/00158

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member			
US	5222425	AU	10078/92	CA	2058659
		ZA	9110187	SE	9200001
US	5392865	AU	17287/92	CA	2069184
		FI	922483	EP	0516561
		ZA	9203479	FR	2676953
GB	2345931	GB	2384016	GB	2384017
		GB	2384018	GB	2385080
		GB	2385351	GB	2385618
		US	6338390	IT	TO20000022
US	5549170	US	5800096		
END OF ANNEX					

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKewed/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**